



Wireless Converter BT

Quick Guide

Designed for wireless communication between HDM (Hamilton Device Manager) and VisiPro DO (Ex) sensors.

© 2013 Hamilton Bonaduz AG. All rights reserved.

Windows is a registered trademark or trademark of Microsoft Corporation in the United States and/or other countries.

P/N: 624630/00 — 07/2013

HAMILTON®

Web: www.hamiltoncompany.com

USA: 800-648-5950

Europe: +41-81-660-60-60

To find a representative
in your area, please visit
hamiltoncompany.com/contacts.


This guide may be available in other languages.
Visit www.hamiltoncompany.com for more information.

Hamilton Americas & Pacific Rim

4970 Energy Way
Reno, Nevada 89502 USA
Tel: +1-775-858-3000
Fax: +1-775-856-7259
sales@hamiltoncompany.com

Hamilton Europe, Asia, & Africa

Via Crusch 8
CH-7402 Bonaduz, Switzerland
Tel: +41-81-660-60-60
Fax: +41-81-660-60-70
contact@hamilton.ch

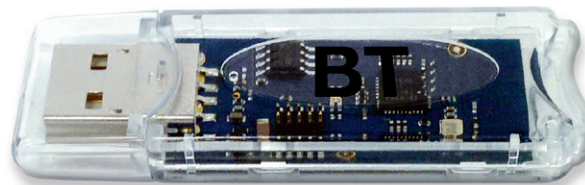

P/N: 243499

HAMILTON®

How to install Wireless Converter BT:




1. Download Zip File «ArcSensorDTM_Setup.msi» from the Hamilton web site www.hamiltoncompany.com
2. Do not plug in any converters to the computer USB port before you have finished the ArcSensorDTM_Setup.msi
3. Depending on the Windows® Security Settings of your computer, a Windows® Message «Open File – Security Warning» may pop up, click «Run»
4. Welcome Screen: click «Next»
5. License Agreement: select «I accept» and click «Next»
6. Installation Folder: accept the default by clicking «Next»
7. Ready to Install: click «Install»
8. Depending on the Windows® Security Settings of your computer, a Windows® Message «Hardware Installation» may pop up twice, click «Continue Anyway» or «Install»
9. Completing Screen: click «Finish»
10. FTDI CDM driver Windows®: click «Extract»
11. Welcome Device Driver Installation Wizard: click «Next»
12. To complete the Device Driver Installation Wizard: click «Finish»
13. Plug in your converter to the USB-port of your computer
 - > For Windows® 7 the driver installs automatically
 - > For Windows® XP follow the next steps

14. Found New Hardware Wizard: select «No, not this time» and click «Next»
15. Found New Hardware Wizard: select «Install the software automatically (Recommended)» and click «Next»
16. Depending on the Windows® Security Settings of your computer, a Windows® Message «Hardware Installation» may pop up, click «Continue Anyway» or «Install»
17. Found New Hardware Wizard: click «Finish»

 **Note:** For optimum wireless trace performance in the «continuous mode» of the HDM:

- Avoid operating any other Wireless Converter BT or View (Ex) Handheld in the environment
- Place the Wireless Converter BT as close as possible to the sensor to be traced
- Reduce the sampling rate of the trace file to a useful value
- Avoid operating more than 30 sensors in the wireless range of the Wireless Converter BT

LED status on the Wireless Converter BT:

- ▶ Software/hardware error
- ▶ Ready to operate
- ▶ Read/write status

